

Ready to harness the *wind*?

Test your location for wind viability with the new *WindLog™*

The WindLog™ is a compact, inexpensive wind data logger designed to test the wind viability of a location prior to the installation of a wind turbine. While many people rely on wind maps to assist them with this purchase decision, these maps do not provide detailed information for a specific area. The WindLog™ allows you to do your own accurate wind study to optimize your turbine placement and its performance. Install it on the prospective land or building to collect data on wind speed, wind gusts, and wind direction in real time.



RainWise® Inc.




The WindLog™ features include:

- 1 MB of Flash memory stores over a years worth of wind data
- Operates on three AA Alkaline or Lithium batteries
- Uses USB power when connected to a computer
- USB port provides fast downloads
- Free Windows software
- Logs average speed, wind gust and average direction
- User selectable logging intervals from one minute to one hour

Data can be downloaded from the WindLog™ using a 15-foot USB cable and the no-cost Windows-based WindLogger™ software (WindSoft), which uses a SQLite database to track and record wind information. The logging interval can be set from once a minute to once an hour. USB extenders can be used to lengthen the USB cable to over 100 feet. The USB cable can be left connected to the WindLog™ allowing real-time viewing of the wind data on a computer. By combining both logged and real-time data WindLog can be used both online and offline. WindSoft can generate statistics, graphs and reports. It can also export CSV files for use with Microsoft Excel or any other application that supports CSV files.

Battery life for the logger will depend upon the environment and logging rates. Typical battery life is 6-9 months. When connected to a computer the WindLog™ will use the USB port power to run. This further extends the life of the batteries.

The Mini-Aervane wind sensor is equipped with low friction race bearings. This reduces the threshold to approximately one mile per hour. The wind direction sensor has a 16-point resolution. Logged direction readings

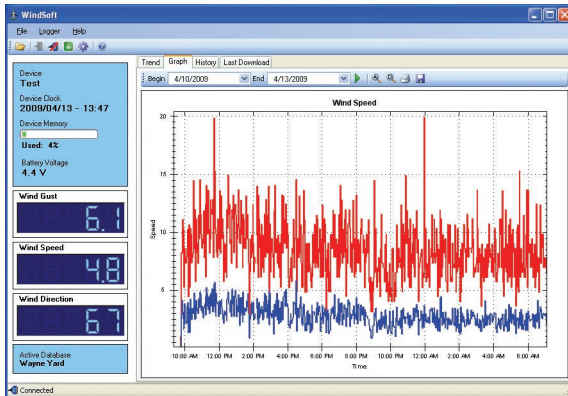

are averaged readings.

A support mast is included with the WindLog™. This mast can be used with the Rainwise® Mono Mount or tripod. The mast may also be attached to a support structure using U-Bolts or lag screws.

Product Specifications

SPEED

Range: 0 – 67 meters per second (150 Mph)
Accuracy: +/- 2%
Sensor: 4-blade propeller – Lexan – UV inhibited
Threshold: .45m/sec. (1 Mph)
Transducer: Magnetic dry reed switch
Frequency: 1 cycle per revolution

DIRECTION

Range: 360° – no deadband
Resolution: 22.5°, averaged.
Accuracy: +/- 22.5°
Sensor: Balanced vane with a 16.5cm (6.6 inch) radius
Threshold: .9 m/sec. (2 mph) at a 10° deflection.
The balanced propeller is supported in stainless steel instrument ball bearings.
The direction is obtained through 8 dry reed switches with no dead band.
The M-AV sensor is made from UV inhibited Dupont Delrin, Lexan and stainless steel.



Warranty Information

The WindLog™ has a 2-year warranty.

RainWise, Inc., is a manufacturer of weather monitoring systems for many industrial uses, including a line of HazMat products used by emergency service professionals. In business since 1974, RainWise is an employee-owned and operated company providing affordably-priced, high-quality products that are manufactured in the U.S. We are committed to providing outstanding customer service. We provide full technical and installation support for all of our products. Call us with any questions or problems. We also have our product showroom in Bar Harbor, Maine, to demonstrate our complete line of consumer products in person.



RainWise® Inc. 
800 762 5723
www.rainwise.com